

# Datasheet

[Get a Quote](#)

## Overview


S1730S-L8P-MA is a Huawei S1730S series switch, providing 24 10/100/1000BASE-T Ethernet ports, 4 Gigabit SFP, and AC power supply. Huawei CloudEngine S1730S series switches are designed for small to medium-sized businesses, including Internet cafes, hotels, schools, and others. With feature-rich services and a silent energy-saving design that's easy to install and maintain, CloudEngine S1730S helps customers build secure, reliable, and high-performance networks.

## Quick Specification

Model	S1730S-L8P-MA
Part Number	98010895
PoE	Supported
Weight (including packaging)	2.47 kg (5.45 lb)
Dimensions without packaging (H x W x D) [mm(in.)]	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)</p>

## Product Details:


### The Front Panel:

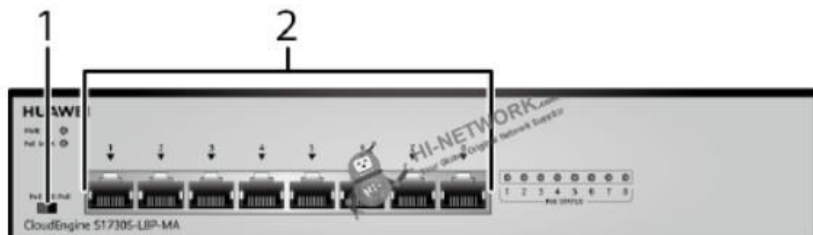

①	PD compatibility check button
②	Eight PoE+ 10/100/1000BASE-T ports

## Datasheet

### The Back Panel:

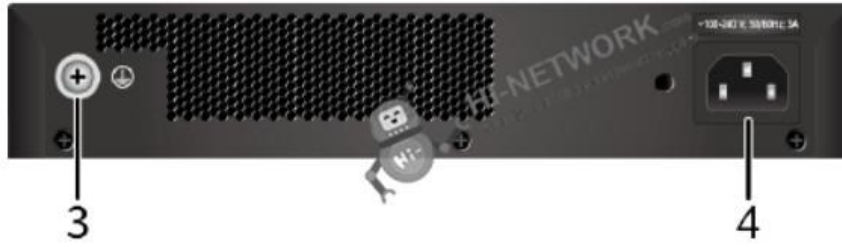

③	Ground screw
④	AC power socket

Get more information:

Do you have any question about the S1730S-L8P-MA 98010895?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	98010895
Model	S1730S-L8P-MA
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 250 mm x 180 mm (1.72 in. x 9.84 in. x 7.09 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 250 mm x 185.4 mm (1.72 in. x 9.84 in. x 7.30 in.)
Weight (including packaging)	2.47 kg (5.45 lb)
Service port surge protection	Common mode: $\pm 7$ kV
Power supply surge protection	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
PoE	Supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	Without PoE: 10 W 100% PoE loads: 143 W (PoE: 124 W)
Typical power consumption (30% of traffic load)	8 W
Operating temperature	-5°C to +45°C (23°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	Noise-free (no fans)



## Datasheet

Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)

## Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

