

Datasheet

[Get a Quote](#)

Overview

Huawei AR G3 AR150 Series - AR157 fixed interface access enterprise router AR0M1570BA00 provides routing and switching functionality for small business or branch offices

Quick Specification

Model	AR207V
Part Number	02353842
Memory	512 MB
Flash	512 MB
Micro SD card (default: sd1)	None
Hard disk	Not supported
Weight(kg)	2.8
Dimensions (W x D x H)	44.5 mm x 300 mm x 220 mm (1.75 in. x 11.8 in. x 8.66 in.)

Product Details:


The Front Panel:



①	USB interface (host)
---	----------------------

Datasheet

The Back Panel:

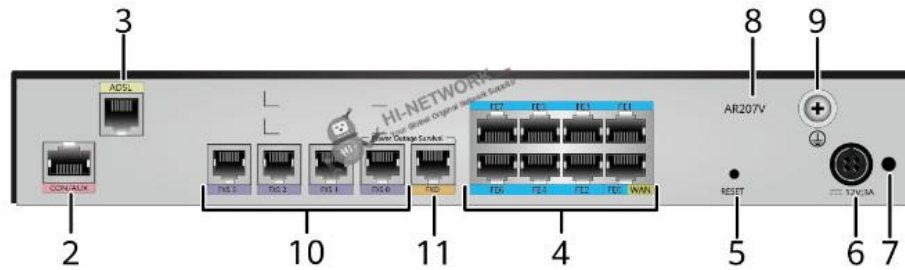

②	CON/AUX interface
③	WAN interface: ADSL-A/M interface
④	LAN interfaces: eight FE electrical interfaces
⑤	RESET button
⑥	Power jack
⑦	Jack for power cable locking strap
⑧	Product model silkscreen
⑨	Ground point
⑩	Four FXS interfaces
11	One FXO interface

Get more information:

Do you have any question about the AR207V 02353842?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Part Number	02353842
Model	AR207V
First Supported Version	V200R002C00
Memory Size	512 MB
Flash Memory	512 MB
Processor	Dual-core, 533 MHz
Micro SD card (default: sd1)	None
Hard disk	Not supported
Dimensions (H x W x D)	With no mounting bracket installed: 44.0 mm x 300.0 mm x 216.4 mm (1.73 in. x 11.81 in. x 8.52 in.) With mounting brackets installed: 44.0 mm x 482.6 mm x 216.4 mm (1.73 in. x 19.00 in. x 8.52 in.)
Weight	2.8 kg

Datasheet

Rated input voltage range (AC)	100 V to 240 V, 50 Hz/60 Hz
Maximum input voltage range (AC)	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum output current	3 A
Maximum output power	36 W
RPS power supply	Not supported
PoE power supply	Not supported
Maximum power consumption	22.8 W
Fan module	None
Airflow (facing the front panel)	None
Management interfaces	1 (RJ45)
CON/AUX interfaces	1 (RJ45)
USB 2.0 interfaces	1
Service interfaces (standard configuration)	<p>WAN interface: one ADSL-A/M interface</p> <p>LAN interfaces: eight FE electrical interfaces, in which LAN interface FE0 can be used as a WAN interface</p> <p>Voice interfaces: four FXS interfaces and one FX0 interface</p>
Extended slots	Not supported
Operating temperature	0° C to 45° C (32° F to 113° F)
Storage temperature	-40° C to +70° C (-40° F to +158° F)
Operating relative humidity	5% to 95%, noncondensing
Operating altitude	< 5000 m (16404.2 ft.)

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)


AR207V (02353842)

Datasheet



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223

