

[Get a Quote](#)

## Overview

S5735-L24T4X-A is the Huawei S5735-L switch with 24 x 10/100/1000Base-T ports, 4 x 10 GE SFP+ ports. Huawei CloudEngine S5735-L is a series of simplified gigabit access switches that provide 12–48 flexible all-GE downlink ports and four fixed GE or 10 GE uplink ports. They are designed for enterprise campus network access and gigabit to the desktop. Built on next-generation, high-performance hardware and powered by Huawei's Versatile Routing Platform (VRP), CloudEngine S5735-L switches feature flexible Ethernet networking, diversified security control, and support for multiple Layer 3 routing protocols — providing higher performance and more powerful service processing capabilities for networks.

## Quick Specification

Table 1 shows the Quick Specification.


|  |   |
|--|---|
| Model  | S5735-L24T4X-A  |
| Part Number  | 98010920  |
| Description  | S5735-L24T4X-A (24*10/100/1000BASE-T ports, 4*10GE SFP+ ports, AC power)  |
| First supported version                            | V200R019C00   |
| Memory   | 1 GB  |
| Flash memory                                       | 512 MB in total. To view the available flash memory size, run the display version command.  |
| PoE  | Not supported   |
| Weight with packaging [kg(lb)]                     | 4   |
| Dimensions without packaging (H x W x D) [mm(in.)] | <p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)</p> |

Figure 1 shows the appearance of S5735-L24T4X-A.



## Product Details

Figure 2 shows the structure of S5735-L24T4X-A.

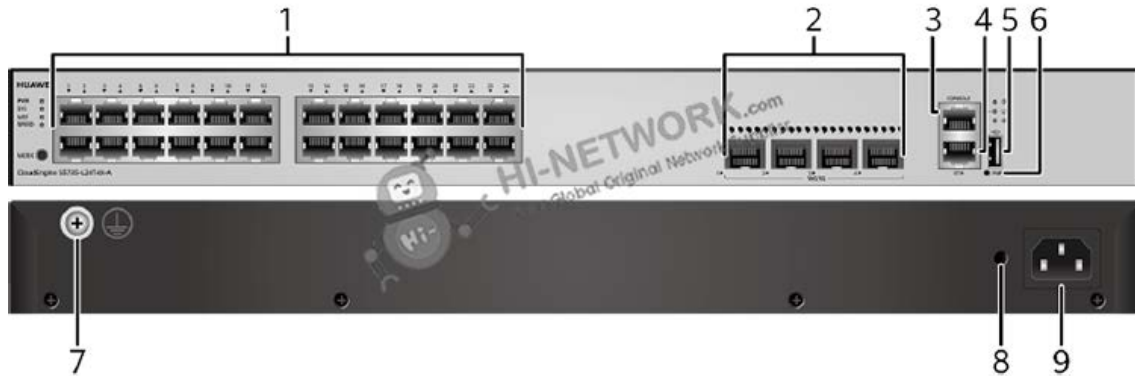

Note:

|     |                                     |     |                                       |
|-----|-------------------------------------|-----|---------------------------------------|
| (1) | Twenty-four 10/100/1000BASE-T ports | (6) | One PNP button                        |
| (2) | Four 10GE SFP+ ports                | (7) | Ground screw                          |
| (3) | One console port                    | (8) | Jack for AC power cable locking strap |
| (4) | One ETH management port             | (9) | AC socket                             |
| (5) | One USB port                        |     |                                       |

## Get More Information

Do you have any question about the S5735-L24T4X-A (98010920)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

| S5735-L24T4X-A Specification                       |   |
|--|---|
| Model  | S5735-L24T4X-A  |
| Part Number  | 98010920  |
| Description  | S5735-L24T4X-A (24*10/100/1000BASE-T ports, 4*10GE SFP+ ports, AC power)  |
| First supported version                            | V200R019C00   |
| Dimensions without packaging (H x W x D) [mm(in.)] | <p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)</p> |
| Chassis height [U]                                 | 1   |

|  |  |
|--|--|
| Weight with packaging [kg(lb)]                                   | 4  |
| Typical power consumption [W]                                    | 27   |
| Typical heat dissipation [BTU/hour]                              | 92.13  |
| Maximum power consumption [W]                                    | 43   |
| Maximum heat dissipation [BTU/hour]                              | 146.7  |
| MTBF [year]  | 50.68  |
| MTTR [hour]  | 2  |
| Availability   | >0.99999   |
| Noise at normal temperature (acoustic power) [dB(A)]             | 47.3   |
| Noise at normal temperature (acoustic pressure) [dB(A)]          | 32.5   |
| Number of card slots   | 0  |
| Number of power slots  | 0  |
| Number of fans modules   | 1  |
| Redundant power supply   | Not supported  |
| Long-term operating temperature [°C(°F)]                         | -5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.)  |
| Short-term operating temperature [°C(°F)]                        | -5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)  |
| Restriction on the operating temperature variation rate [°C(°F)] | <p>When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).</p> <p>The equipment can operate beyond the normal operating temperature range for a short-term period, but the following conditions must be met:</p> <ul style="list-style-type: none"> <li>- The equipment operates at a temperature of over 50°C (122°F) consecutively for at most 96 hours in one year.</li> <li>- The equipment operates at a temperature of over 50°C (122°F) for a total of no more than 360 hours in one year.</li> <li>- The equipment operates at a temperature of over 50°C (122°F) for no more in 15 times in one year.</li> </ul> <p>The equipment may be damaged or experience unexpected exceptions if any of the preceding limits is exceeded.</p> <p>The equipment cannot start when the temperature is lower than 0°C (32°F). The maximum distance of optical modules used in these conditions cannot exceed 10 km.</p> |
| Storage temperature [°C(°F)]                                     | -40°C to +70°C (-40°F to +158°F)   |
| Long-term operating relative humidity [RH]                       | 5% to 95%, noncondensing   |
| Long-term operating altitude [m(ft.)]                            | 0-5000 m (0-16404 ft.)   |
| Storage altitude [m(ft.)]  | 0-5000 m (0-16404 ft.)   |
| Power supply mode  | AC built-in  |
| Rated input voltage [V]  | <ul style="list-style-type: none"> <li>- AC input: 100 V AC to 240 V AC, 50/60 Hz</li> <li>- High-Voltage DC input: 240 V DC</li> </ul>  |
| Input voltage range [V]  | <ul style="list-style-type: none"> <li>- AC input: 90 V AC to 264 V AC, 47 Hz to 63 Hz</li> <li>- High-Voltage DC input: 190 V DC to 290 V DC</li> </ul>   |
| Memory   | 1 GB   |

|                                    |  |
|------------------------------------|--|
| Flash memory                       | 512 MB in total. To view the available flash memory size, run the display version command. |
| Console port                       | RJ45   |
| Eth Management port                | RJ45   |
| USB                                | Supported  |
| RTC                                | Not supported  |
| RPS input                          | Not supported  |
| Service port surge protection [kV] | Common mode: $\pm 7$ kV  |
| Power supply surge protection [kV] | $\pm 6$ kV in differential mode, $\pm 6$ kV in common mode                                 |
| Types of fans                      | Built-in   |
| Heat dissipation mode              | Heat dissipation with fan, intelligent fan speed adjustment                                |
| Airflow direction                  | Air intake from left and front, air exhaustion from right                                  |
| PoE                                | Not supported  |
| Certification                      | EMC certification<br>Safety certification<br>Manufacturing certification                   |

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales](#) or [Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223

