

Datasheet

[Get a Quote](#)

Overview

Huawei S5720-52X-PWR-SI-ACF is a Layer 3 Ethernet switch. It supports forty-eight Ethernet 10/100/1,000 PoE+ ports and 4 x 10G SFP. It offers 1150W AC power supply.


Quick Specification

| | |
|--------------------------------|---|
| Model | S5720-52X-PWR-SI-ACF |
| Part Number | 02350DLY |
| Memory (RAM) | 512 MB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |
| PoE | Supported |
| Weight with packaging [kg(lb)] | 10 kg (22.05 lb) |
| Dimensions (H x W x D) | Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 510.5 mm (1.75 in. x 17.4 in. x 20.1 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 541.1 mm (1.75 in. x 17.4 in. x 21.3 in.) |

Datasheet

Product Details:

Appearance:

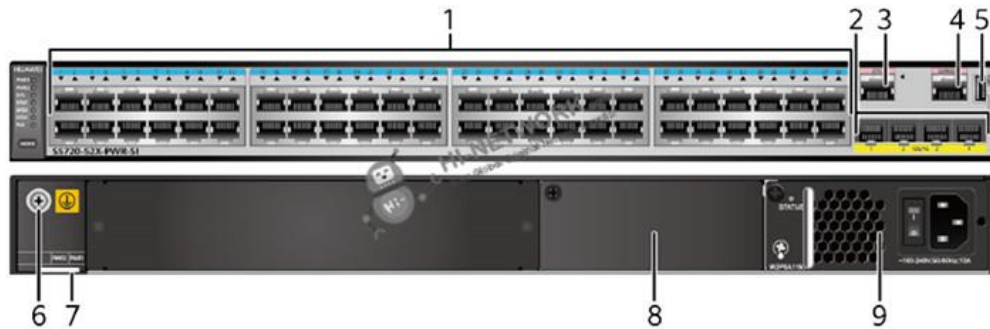

| | |
|---|--|
| ① | Forty-eight PoE+ 10/100/1000BASE-T ports |
| ② | Four 10GE SFP+ ports |
| ③ | One ETH management port |
| ④ | One console port |
| ⑤ | One USB port |
| ⑥ | Ground screw |
| ⑦ | ESN label |
| ⑧ | Power module slot 2 |
| ⑨ | Power module slot 1 |

The Accessories for S5720-52P-LI-ACF:

Recommended Models:

| Model | Description |
|--------------------------------------|---|
| GE-SFP Optical Transceiver | |
| SFP-1000BaseT | Electrical Transceiver, SFP, GE, Electrical Interface Module(100m,RJ45) |
| eSFP-GE-SX-MM850 | Optical Transceiver, eSFP, GE, Multi-mode Module(850nm,0.55km,LC) |
| SFP-GE-LX-SM1310 | Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,10km,LC) |
| S-SFP-GE-LH40-SM1310 | Optical Transceiver, eSFP, GE, Single-mode Module(1310nm,40km,LC) |
| S-SFP-GE-LH40-SM1550 | Optical Transceiver, eSFP, GE, Single-mode Module(1550nm,40km,LC) |

Datasheet

| | |
|--------------------------------------|--|
| 10GE SFP+ optical transceiver | |
| SFP-10G-USR | 10GBase-USR Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.1km,LC) |
| OMXD30000 | Optical Transceiver,SFP+,10G,Multi-mode Module(850nm,0.3km,LC) |
| OSX010000 | Optical Transceiver,SFP+,10G,Single-mode Module(1310nm,10km,LC) |
| Power Module | |
| W2PSA1150 | Huawei 1150W AC Power Module |

Compare to Similar Items:

| | | |
|----------------|---------------------------------------|---------------------------------------|
| Models | S5720-52X-PWR-SI-AC | S5720-52X-PWR-SI-ACF |
| Downlink Ports | 48 x Ethernet 10/100/1,000 PoE+ ports | 48 x Ethernet 10/100/1,000 PoE+ ports |
| Uplink Ports | 4 x 10 Gig SFP+ | 4 x 10 Gig SFP+ |
| Power Supply | 500W AC Power Supply | 1150W AC Power Supply |
| PoE | Supported | Supported |

Get more information:

Do you have any question about the S5720-52X-PWR-SI-ACF 02350DLY?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

| | |
|-----------------------------------|---|
| Part Number | 02350DLY |
| Model | S5720-52X-PWR-SI-ACF |
| Memory (RAM) | 512 MB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |
| Mean time between failures (MTBF) | 50.86 years |
| Mean time to repair (MTTR) | 2 |
| Availability | > 0.99999 |
| Service port surge protection | Common mode: ± 6 kV |
| Power supply surge protection | Using 1000 W AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using 1150 W AC power modules: ± 2 kV in differential mode, ± 4 kV in common mode |
| Dimensions (H x W x D) | Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 510.5 mm (1.75 in. x 17.4 in. x 20.1 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 541.1 mm (1.75 in. x 17.4 in. x 21.3 in.) |

Datasheet

| | |
|--|---|
| Weight (with packaging) | 10 kg (22.05 lb) |
| Stack ports | GE electrical ports and 10GE SFP+ optical ports on the front panel |
| RTC | Supported |
| RPS | Not supported |
| PoE | Supported |
| Rated voltage range | 100 V AC to 240 V AC, 50/60 Hz |
| Maximum voltage range | 90 V AC to 264 V AC, 47 Hz to 63 Hz |
| Maximum power consumption (100% throughput, full speed of fans) | Not providing the PoE function: 94.8 W 100% PoE loads: 1631.5 W (system power consumption: 191.5 W, PoE: 1440 W) |
| Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> • Tested according to ATIS standard • EEE enabled • No PoE power consumption | 57 W |
| Operating temperature | 0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Short-term operating temperature | -5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Storage temperature | -40°C to +70°C (-40°F to +158°F) |
| Noise under normal temperature (27°C, sound power) | < 56.5 dB(A) |
| Relative humidity | 5% to 95%, noncondensing |
| Operating altitude | 0-5000 m (0-16404 ft.) |
| Certification | EMC certification Safety certification Manufacturing certification |

Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223