

[Get a Quote](#)

Overview

S5710-52C-LI Bundle (48 Ethernet 10/100/1000 ports, with 1 interface slot, with 150W AC power supply).

Quick Specification

Table 1 shows the Quick Specification.


Model	S5710-52C-LI
Part Number	02354138
Description	S5710-52C-LI Bundle (48 Ethernet 10/100/1000 ports, with 1 interface slot, with 150W AC power supply)
Memory (RAM)	256 MB
Flash	32 MB
Dimensions (H x W x D)	442.0 mm x 420.0 mm x 43.6 mm (17.4 in. x 16.5 in. x 1.72 in.)
Weight (with packaging)	Empty: ≤ 5 kg (11.02 lb) Fully loaded: ≤ 8.5 kg (18.74 lb)
Stack ports	Two stack ports available on each stack card
PoE	Not supported

Figure 1 shows the appearance of S5710-52C-LI.



Product Details

Figure 2 shows the structure of S5710-52C-LI.

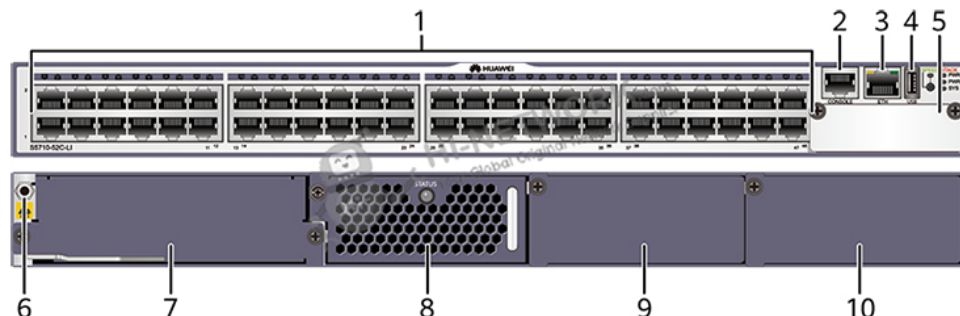

Note:

(1)	Forty-eight 10/100/1000BASE-T ports	(6)	ESD jack
(2)	One console port	(7)	Rear card slot
(3)	One ETH management port	(8)	Fan slot
(4)	One USB port	(9)	Power module slot 2
(5)	Front card slot	(10)	Power module slot 1

Get more information

Do you have any question about the S5710-52C-LI (02354138)?

Contact us now via info@hi-network.com.

Specification

S5710-52C-LI Specification	
Model	S5710-52C-LI
Part Number	02354138
Description	S5710-52C-LI Bundle (48 Ethernet 10/100/1000 ports, with 1 interface slot, with 150W AC power supply)
Software Version	V200R001C00 only
Memory (RAM)	256 MB
Flash	32 MB
Mean time between failures (MTBF)	51.3 years when a 2-port 10GE interface card is configured, 70.3 years when a 4-port GE front card is configured, 28.58 years when a 4-port 10GE front card is configured

Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: ± 2 kV
Power supply surge protection	Using AC power modules: ± 6 kV in differential mode, ± 6 kV in common mode Using DC power modules: ± 1 kV in differential mode, ± 2 kV in common mode
Dimensions (W x D x H)	442.0 mm x 420.0 mm x 43.6 mm (17.4 in. x 16.5 in. x 1.72 in.)
Weight	Empty: ≤ 5 kg (11.02 lb) Fully loaded: ≤ 8.5 kg (18.74 lb)
Stack ports	Two stack ports available on each stack card
RPS	Not supported
PoE	Not supported
Rated voltage range	100 V AC to 240 V AC, 50/60 Hz -48 V DC to -60 V DC
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz -36 V DC to -72 V DC
Maximum power consumption (100% throughput, full speed of fans)	78 W
Operating temperature	0°C to 50°C (32°F to 122°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 41 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	AC power modules configured: 0-5000 m (0-16404 ft.) DC power modules configured: 0-2000 m (0-6562 ft.)
Certification	EMC certification Safety certification Manufacturing certification

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)


S5710-52C-LI (02354138)

Datasheet



Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork

WhatsApp Business: +8618057156223

