

Get a Quote

Overview

C2960X-STACK is a Cisco Catalyst 2960-X and 2960-XR Series Switches FlexStack Plus Stacking Module, which allows these switches stack with each other to offer flexible management.

Quick Specification

Stacking Item	C2960-X	C2960-XR
Bidirectional stack bandwidth	80Gbps	80Gbps
Hot-swappable stack module	Yes	Yes
Max stack members	8	8
Supports FlexStack	Yes	No
Supports FlexStack-Plus	Yes	Yes


The 2960-S and 2960-X support a mixed stack of 2960 models. All these 2960 models run the FlexStack protocol, allowing them to be stacked together into a single stack. The exception is the 2960-XR does not stack with either the 2960-X or the 2960-S. The 2960-XR has the IP-Lite feature set, and this is not compatible with the LAN Base feature set on the 2960-X and 2960-XR.

Mixed Stack Combination	2960-XR IP Lite	2960-X LAN Base	2960-S LAN Base
2960-XR IP Lite	Yes	No	No
2960-X LAN Base	No	Yes	Yes
2960-S LAN Base	No	Yes	Yes

Get a Quote



Quick Installation:

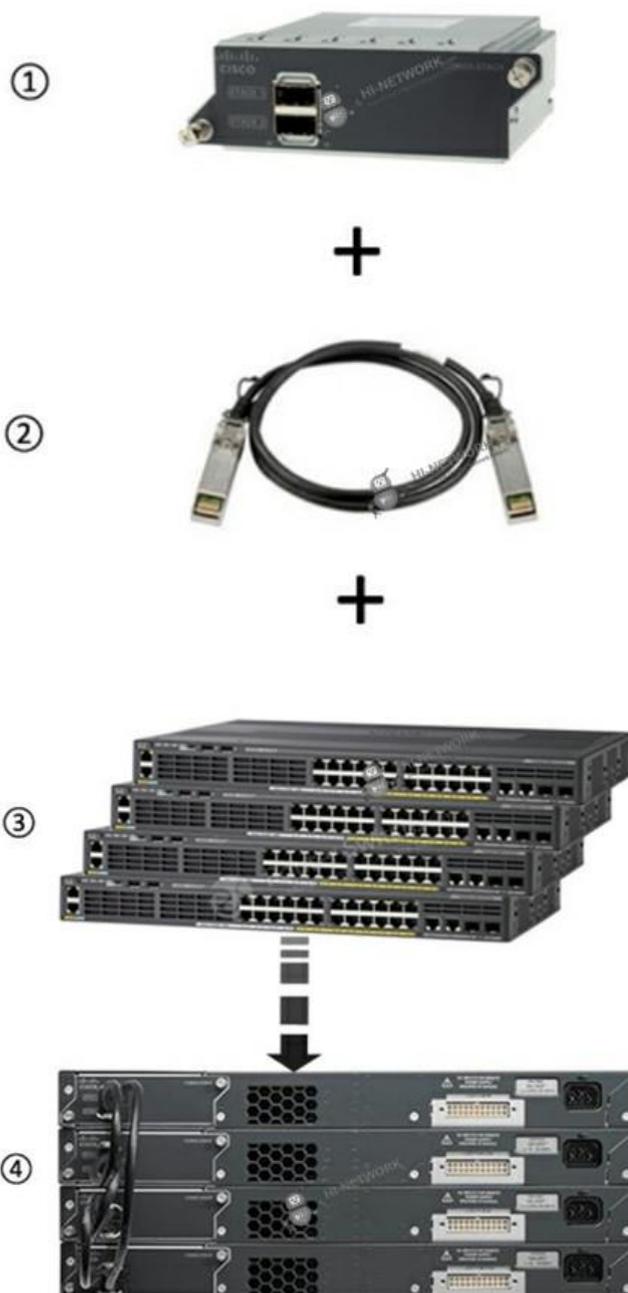

①	C2960X-STACK
②	STACK CABLE
③	CISCO 2960X and 2960XR Series Stackable Switches
④	Switches with Stack cable and C2960X-STACK



Get a Quote

First, C2960X-STACK should be installed in the switches which support to stack

The stack module slot is on the back panel of the switch.



Second, Use the stack cable to connect each switch installed C2960X-STACK.

There are two stack port and stack cable should be inserted into them.

Use stack cable to connect switches one by one through professional ways.



Last, set up the stackable switches and use one of them to be the manager.

Get a Quote

Product Details:



The Recommended Switches and Stack Cables

Recommend stackable switches and stack cables

Cisco 2960X Switches	Cisco 2960XR Switches
WS-C2960X-24TS-L	WS-C2960XR-24TS-I
WS-C2960X-24PS-L	WS-C2960XR-48TS-I
WS-C2960X-48FPD-L	WS-C2960XR-24PD-I
WS-C2960X-48LPS-L	WS-C2960XR-24PS-I
WS-C2960X-48FPS-L	WS-C2960XR-24TD-I
WS-C2960X-48TD-L	WS-C2960XR-48LPD-I
WS-C2960X-48TS-L	WS-C2960XR-48LPS-I
WS-C2960X-24TD-L	WS-C2960XR-48TD-I
WS-C2960X-24PD-L	WS-C2960XR-48FPS-I
WS-C2960X-48LPD-L	WS-C2960XR-48FPD-I
WS-C2960X-24PSQ-L	



Get a Quote

Stack Cables
CAB-STK-E-0.5M
CAB-STK-E-1M
CAB-STK-E-3M

Get more information:

Do you have any question about C2960X-Stack?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Model	C2960X-STACK
Designed For	Catalyst 2960-X Series Catalyst 2960-XR Series
Bidirectional stack bandwidth	C2960-X: 80Gbps C2960-XR: 80Gbps
Hot-swappable stack module	C2960-X: Yes C2960-XR: Yes
Max stack members	C2960-X: 8 C2960-XR: 8
Supports FlexStack	C2960-X: No C2960-XR: Yes
Supports FlexStack-Plus	C2960-X: Yes C2960-XR: Yes
Net Weight	1.6 Kg
Package Weight	2.24 Kg



Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223