

# Datasheet

[Get a Quote](#)

## Overview


S2720-52TP-EI(32 Ethernet 10/100 ports,16 Ethernet 10/100/1000 ports,4 Gig SFP,AC 110/220V)

## Quick Specification

Model	S2720-52TP-EI
Part Number	98010673
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Not supported
Dimensions (H x W x D)	<p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)</p>
Weight(including package)	4.4 kg (9.7 lb)

## Product Details:

### The Front Panel:

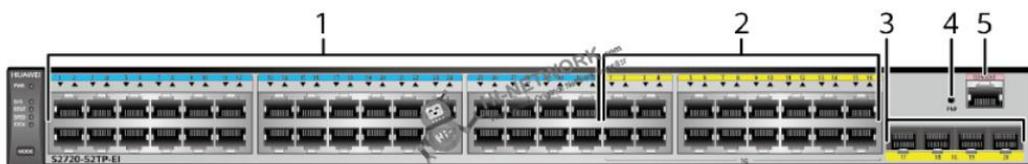

①	Thirty-two 10/100BASE-TX ports
②	Sixteen 10/100/1000BASE-T ports

## Datasheet

③	Four 1000BASE-X ports
④	PNP button
⑤	One console port

### The Back Panel:



⑥	Ground screw
⑦	Jack reserved for AC power cable locking strap
⑧	AC socket

Get more information:

Do you have any question about the S2720-52TP-EI 98010673?

Contact us now via e-mail: [info@hi-network.com](mailto:info@hi-network.com)

### Specific Data Sheet:

Part Number	98010673
Model	S2720-52TP-EI
Memory (RAM)	512 MB
Flash	512 MB in total. To view the available flash memory size, run the <b>display version</b> command.
Mean time between failures (MTBF)	31 years
Mean time to repair (MTTR)	2 hours
Availability	> 0.99999
Service port surge protection	Common mode: $\pm 7$ kV
Power supply surge protection	$\pm 6$ kV in differential mode, $\pm 6$ kV in common mode
Dimensions (H x W x D)	Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 224.8 mm (1.72 in. x 17.4 in. x 8.85 in.) Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 233.8 mm (1.72 in. x 17.4 in. x 9.21 in.)
Weight (including package)	4.4 kg (9.7 lb)
Stack ports	Four 1000BASE-X ports
RTC	Not supported
RPS	Not supported
PoE	Not supported

## Datasheet

Rated voltage range	100 V AC to 240 V AC, 50/60 Hz
Maximum voltage range	90 V AC to 264 V AC, 47 Hz to 63 Hz
Maximum power consumption (100% throughput)	40.3 W
Typical power consumption (30% of traffic load) <ul style="list-style-type: none"> <li>• Tested according to ATIS standard</li> <li>• EEE enabled</li> <li>• No PoE power consumption</li> </ul>	30.3 W
Operating temperature	0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.)
Short-term operating temperature	-5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Noise under normal temperature (27°C, sound power)	< 44.5 dB(A)
Relative humidity	5% to 95%, noncondensing
Operating altitude	0-5000 m (0-16404 ft.)
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

S2720-52TP-EI (98010673)



**HI-NETWORK.com**  
Your Global Original Network Supplier

## Datasheet

WhatsApp Business: +8618057156223

