

[Get a Quote](#)

## Overview

The S5700 series Ethernet switches are next-generation energy-saving switches developed by Huawei to meet the demand for high-bandwidth access and Ethernet multi-service aggregation. Based on cutting-edge hardware and Huawei Versatile Routing Platform (VRP) software, the S5700 provides a large switching capacity, high reliability (double power slots and hardware Ethernet OAM), and high-density GE ports to accommodate 10 Gbit/s upstream transmissions. It also supports Energy Efficient Ethernet (EEE) and iStack. The S5700 can be used in various enterprise network scenarios. For example, it can function as an access or aggregation switch on a campus network, a gigabit access switch in an Internet data center (IDC), or a desktop switch to provide 1000 Mbit/s access for terminals.

## Quick Specification

Table 1 shows the Quick Specification.


Model	S5735-S8P2X-IA200G1
Part Number	02312NTA-001
Description	Function Module, S5735-S4T2X-IA150G1, 220Vac Single-Phase Input, 144W Max Combined Output Power (12Vdc/24Vac), Natural Heat Dissipation
First supported version	V200R019C10
Dimensions without packaging (H x W x D) [mm(in.)]	550 mm x 300 mm x 135 mm (21.65 in. x 11.81 in. x 5.31 in.)
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
PoE	Supported

Figure 1 shows the appearance of S5735-S8P2X-IA200G1.



## Product Details

Figure 2 show the interior of the S5735-S8P2X-IA200G1 maintenance compartment.

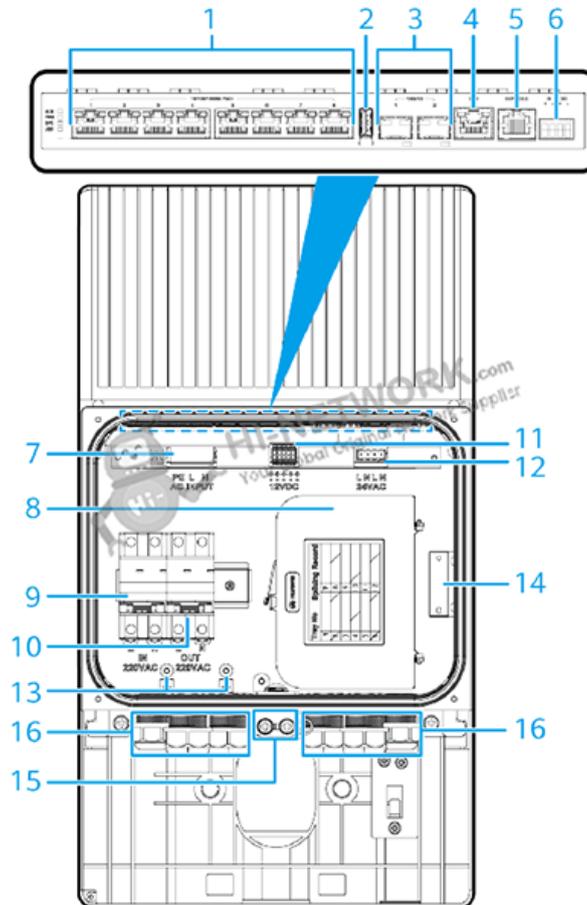

Note:

(1)	Eight PoE+ 10/100/1000BASE-T ports
(2)	One USB port
(3)	Two 10GE SFP+ ports
(4)	One ETH management port
(5)	One console port
(6)	Monitoring port DI: signal input line, which connects to a door status sensor. DO: signal output line, which connects to a camera alarm signal cable.
(7)	220 V AC power input socket
(8)	Fiber management tray (FMT)
(9)	220 V AC power input circuit breaker
(10)	220 V AC power output circuit breaker
(11)	12 V DC power output socket
(12)	24 V AC power output socket

(13)	PE cable ground terminal
(14)	Door status sensor
(15)	Ground screw
(16)	Cable outlet

## Get More Information

Do you have any question about the S5735-S8P2X-IA200G1 (02312NTA-001)?

Contact us now via [info@hi-network.com](mailto:info@hi-network.com).

## Specification

S5735-S8P2X-IA200G1 Specification	
Model	S5735-S8P2X-IA200G1
Part Number	02312NTA-001
Description	Function Module, S5735-S4T2X-IA150G1, 220Vac Single-Phase Input, 144W Max Combined Output Power (12Vdc/24Vac), Natural Heat Dissipation
First supported version	V200R019C10
Dimensions without packaging (H x W x D) [mm(in.)]	550 mm x 300 mm x 135 mm (21.65 in. x 11.81 in. x 5.31 in.)
Weight without packaging [kg(lb)]	9.2
Weight without packaging (full configuration) [kg(lb)]	9.2
Weight with packaging [kg(lb)]	12.2
Typical power consumption [W]	31
Typical heat dissipation [BTU/hour]	105.78
Maximum power consumption [W]	- With no output power: 34 W - With output power: 209 W (device power consumption: 49 W; output power: 160 W)
Maximum heat dissipation [BTU/hour]	- With no output power: 111 - With output power: 713.13
MTBF [year]	57.28
MTTR [hour]	2
Availability	>0.99999
Noise at normal temperature (acoustic power) [dB(A)]	Noise-free (no fans)
Noise at normal temperature (acoustic pressure) [dB(A)]	Noise-free (no fans)
Number of card slots	0
Number of power slots	0

Number of fans modules	0
Redundant power supply	Not supported
Long-term operating temperature [°C(°F)]	<p>-40°C to +75°C (-40°F to 167°F)</p> <p>NOTE:</p> <p>-25°C to +75°C (-13°F to +167°F): sunshade needed; 400 LFM air velocity (minimum); GPON optical modules not supported</p> <p>-25°C to +70°C (-13°F to +158°F): sunshade needed; 200 LFM air velocity (minimum); GPON optical modules supported</p> <p>-30°C to +60°C (-22°F to +140°F): sunshade needed; 40 LFM air velocity (minimum); GPON optical modules supported</p> <p>-35°C to +55°C (-31°F to +131°F): sunshade needed; no requirement on the air velocity; GPON optical modules supported</p> <p>-35°C to +45°C (-31°F to +113°F): 1120 W/m2 solar radiation (maximum); no requirement on the air velocity</p> <p>-40°C to -35°C (-40°F to -31°F): Stable port performance can be achieved only when at least four Ethernet electrical ports go Up.</p>
Restriction on the operating temperature variation rate [°C(°F)]	When the altitude is 1800-4000 m (5906-13123 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).
Storage temperature [°C(°F)]	-40°C to +85°C (-40°F to +185°F)
Long-term operating relative humidity [RH]	5% to 95%, noncondensing
Long-term operating altitude [m(ft.)]	0-4000 m (0-13123 ft.)
Storage altitude [m(ft.)]	0-4000 m (0-13123 ft.)
Power supply mode	AC built-in
Rated input voltage [V]	220 V AC to 240 V AC, 50/60 Hz
Input voltage range [V]	176 V AC to 264 V AC, 45 Hz to 66 Hz
Memory	1 GB
Flash memory	512 MB in total. To view the available flash memory size, run the display version command.
Console port	RJ45
Eth Management port	RJ45
USB	Supported
RTC	Not supported
RPS input	Not supported
Service port surge protection [kV]	±1.5 kV in differential mode, ±6 kV in common mode
Power supply surge protection [kV]	<p>Surge current:</p> <ul style="list-style-type: none"> <li>- AC input: 20 kA</li> </ul> <p>Surge:</p> <ul style="list-style-type: none"> <li>- AC input: ±6 kV in differential mode; ±6 kV in common mode</li> <li>- 12 V DC output: ±2 kV in differential mode; ±4 kV in common mode</li> <li>- 24 V AC output: ±2 kV in differential mode; ±6 kV in common mode</li> </ul>
Types of fans	None

Heat dissipation mode	Natural heat dissipation without fans
Airflow direction	-
PoE	Supported
Certification	EMC certification Safety certification Manufacturing certification

## Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

## Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: [info@hi-network.com](mailto:info@hi-network.com)

Skype: echo.hinetwork

WhatsApp Business: +8618057156223