

Datasheet

[Get a Quote](#)

Overview

Huawei S6720-LI series are next-generation simplified all-10 GE fixed switches and can be used for 10 GE access on campus and data center networks.


Quick Specification

| | |
|--------------------------------|--|
| Model | S6720-32X-LI-32S-AC |
| Part Number | 98010693 |
| Memory | 1 GB |
| Flash memory | 512 MB in total. To view the available flash memory size, run the display version command. |
| PoE | Supported |
| Weight with packaging [kg(lb)] | 7 kg (15.43 lb) |
| Dimensions (H x W x D) | <p>Basic dimensions (excluding the parts protruding from the body): 44.4 mm x 442.0 mm x 425.0 mm (1.75 in. x 17.4 in. x 16.73 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the handle on the rear panel): 44.4 mm x 442.0 mm x 451.3 mm (1.75 in. x 17.4 in. x 17.77 in.)</p> <p>When 1150 W power modules are installed, they stretch out from the chassis. Therefore, the total depth of the switch changes to 541.1 mm (21.3 in.).</p> |

Datasheet

Product Details:

Appearance:

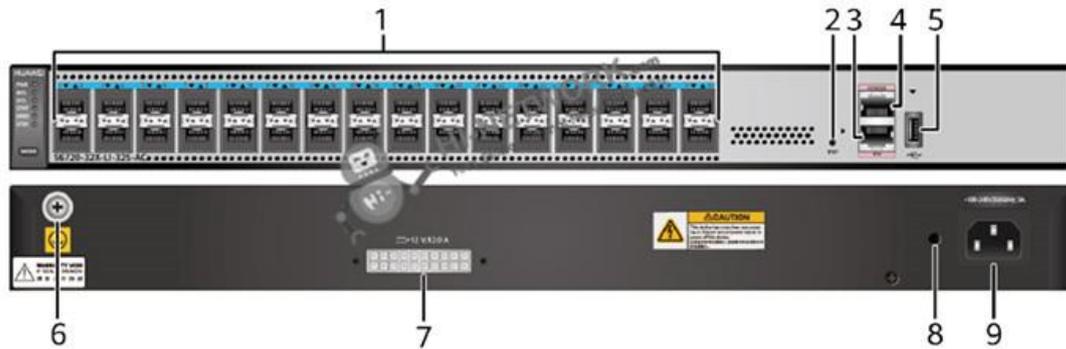

| | |
|---|---------------------------------------|
| ① | Thirty-two 10GE SFP+ ports |
| ② | One PNP button |
| ③ | One ETH management port |
| ④ | One console port |
| ⑤ | One USB port |
| ⑥ | Ground screw |
| ⑦ | RPS socket |
| ⑧ | Jack for AC power cable locking strap |
| ⑨ | AC socket |

Get more information:

Do you have any question about the S6720-32X-LI-32S-AC 98010693?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

| | |
|--------------|---|
| Part Number | 98010693 |
| Model | S6720-32X-LI-32S-AC |
| Memory (RAM) | 1 GB |
| Flash | 512 MB in total. To view the available flash memory size, run the display version command. |

Datasheet

| | |
|--|--|
| Mean time between failures (MTBF) | 42.8 years |
| Mean time to repair (MTTR) | 2 |
| Availability | > 0.99999 |
| Service port surge protection | NA |
| Power supply surge protection | ±6 kV in differential mode, ± 6 kV in common mode |
| Dimensions (H x W x D) | <p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 225.0 mm (1.72 in. x 17.4 in. x 8.86 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 234.4 mm (1.72 in. x 17.4 in. x 9.23 in.)</p> |
| Weight (with packaging) | 4.3 kg (9.48 lb) |
| Stack ports | Any 10GE SFP+ ports (a maximum of 16 physical ports) |
| RTC | Supported |
| RPS | Supported |
| PoE | Not supported |
| Rated voltage range | 100 V AC to 240 V AC, 50/60 Hz |
| Maximum voltage range | 90 V AC to 264 V AC, 47 Hz to 63 Hz |
| Maximum power consumption (100% throughput, full speed of fans) | 108.5 W |
| Typical power consumption (30% of traffic load, tested according to ATIS standard) | 71.8 W |
| Operating temperature | 0°C to 45°C (32°F to 113°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Short-term operating temperature | -5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Storage temperature | -40°C to +70°C (-40°F to +158°F) |
| Noise under normal temperature (27°C, sound power) | < 46.4 dB(A) |
| Relative humidity | 5% to 95%, noncondensing |
| Operating altitude | 0-5000 m (0-16404 ft.) |
| Certification | <p>EMC certification</p> <p>Safety certification</p> <p>Manufacturing certification</p> |

S6720-32X-LI-32S-AC (98010693)

Datasheet



Want to Buy

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales or Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: [echo.hinetwork](https://www.skype.com/people/echo.hinetwork)

WhatsApp Business: +8618057156223