

Get a Quote

Overview


N2K-C2348UPQ is a Cisco Nexus 2300 Platform Chassis, offering 2 power supply, 3 Fan Modules, 48x1/10GE (req SFP/SFP+) + 6x40G QSFP+(req QSFP+), and choice of airflow. Cisco Nexus 2300 platform fabric extenders are the successors to the industry's widely adopted Cisco Nexus 2000 Series Fabric Extenders. The Nexus 2300 platform with its Cisco fabric extender architecture provides a highly scalable unified server-access platform across a range of connectivity options such as 100 Megabit Ethernet; 1, 10, and 40 Gigabit Ethernet; unified fabric; copper and fiber connectivity; and rack and blade server environments.

Quick Specification

Product Code	N2K-C2348UPQ
Fabric extender host interfaces	48
Fabric extender host interface type	For 48 x 1/10 Gigabit Ethernet host interface ports: 1/10 Gigabit Ethernet ports SFP/SFP+ AOC cables DS-SFP-FC16G-SW
Fabric extender fabric interfaces	6 x 40 Gigabit Ethernet QSFP (24 x 10 Gigabit Ethernet)
Fabric speed	Up to 240 Gbps in each direction (480-Gbps full duplex)
Performance	Hardware forwarding at 1440 Gbps or 2160 mpps
FCoE	FCoE supported (Cisco Nexus 5500 and 5600 platforms and 6000 Series) (select N7k platforms since 7.3 release)
Cisco parent switch	Cisco Nexus 5500 and 5600 platforms Cisco Nexus 6000 Series Cisco Nexus 7000 Series and 7700 platform Cisco Nexus 9300 and 9500 Series
Dimensions (H x W x D)	4.37 x 43.94 x 35.69 cm
Net Weight	7.0 Kg


Product Details:

The Front Panel:

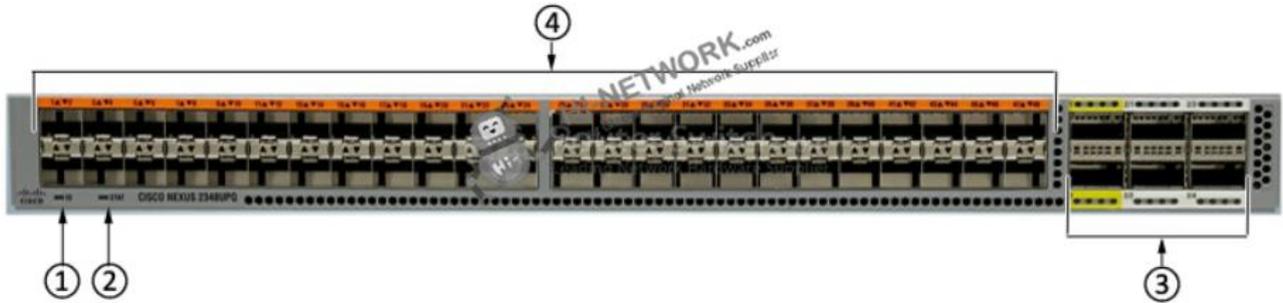

①	ID LED
②	Status LED
③	40-Gigabit ports (six) for QSFP+ transceivers and 40-Gigabit QSFP+ to four 10-Gigabit SFP+ breakout cables
④	Fixed 1- and 10-Gigabit Unified-capable ports (48) for SFP or SFP+ transceivers

The back panel

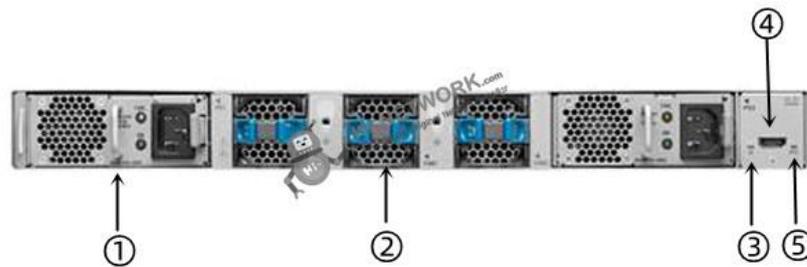

①	Power supply modules (one or two, hot swappable) (AC power supply shown)
②	Fan modules (two, hot swappable)
③	ID LED
④	Management/Console HDMI port

⑤	Status LED
---	------------

The Accessories

Modules and Cables:

Models	Description
SFP-10G-SR	10GBASE-SR SFP Module
SFP-H10GB-CU1M	Cisco Direct-Attach Twinax Copper Cable Assembly with SFP+ Connectors SFP-H10GB-CU1M
SFP-H10GB-CU5M	SFP-H10GB-CU5M,5M Passive Copper Twinax Cable F, Nexus,24AWG cable assembly
QSFP-H40G-CU5M	Cisco QSFP to QSFP copper direct-attach 40GBASE-CR4 cable QSFP-H40G-CU5M
QSFP-40G-LR4	40GBase-LR4 Optical Transceiver,QSFP+,40GE,Single-mode Module(1310nm,10km,LC)

Compare to Similar Items

Product Code	N2K-C2348TQ	N2K-C2348UPQ
Fabric extender host interfaces	48	48
Fabric extender host interface type	48 x 100M/1/10GBASE-T ports: RJ-45 connectors	For 48 x 1/10 Gigabit Ethernet host interface ports: 1/10 Gigabit Ethernet ports SFP/SFP+ AOC cables DS-SFP-FC16G-SW
Fabric extender fabric interfaces	6 x 40 Gigabit Ethernet QSFP (24 x 10 Gigabit Ethernet)	6 x 40 Gigabit Ethernet QSFP (24 x 10 Gigabit Ethernet)
Fabric speed	Up to 240 Gbps in each direction (480-Gbps full duplex)	Up to 240 Gbps in each direction (480-Gbps full duplex)
Performance	Hardware forwarding at 1440 Gbps or 2160 mpps	Hardware forwarding at 1440 Gbps or 2160 mpps
Cisco parent switch	Cisco Nexus 5500 and 5600 platforms Cisco Nexus 6000 Series Cisco Nexus 7000 Series and 7700 platform Cisco Nexus 9300 and 9500 Series	Cisco Nexus 5500 and 5600 platforms Cisco Nexus 6000 Series Cisco Nexus 7000 Series and 7700 platform Cisco Nexus 9300 and 9500 Series

Get more information:

Do you have any question about the N2K-C2348UPQ?

Contact us now via e-mail: info@hi-network.com

Specific Data Sheet:

Type	Cisco Nexus 2348TQ-E
------	----------------------



Fabric extender host interfaces	48
Fabric extender host interfaces type	<p>For 48 x 1/10 Gigabit Ethernet host interface ports</p> <p>1/10 Gigabit Ethernet ports SFP/SFP+ (supported transceiver and cables include Twinax SFP-H10GB-CU1M, SFP-H10GB-CU1-5M, SFP-H10GB-CU2M, SFP-H10GB-CU2-5M SFP-H10GB-CU3M, SFP-H10GB-CU5M, SFP-H10GBACU7M, and SFP-H10GB-ACU10M; SFP+ SFP-10G-SR, SFP-10G-SR-S, SFP-10G-LR, and SFP-10G-LR-S; and SFP GLC-T, GLC-SX-MM, GLC-LH-SM, SFP-GE-T, SFP-GE-S, and SFP-GE-L)</p> <p>AOC cables: SFP-10G-AOC1M, SFP-10G-AOC2M, SFP-10G-AOC3M, SFP-10G-AOC5M, SFP-10G-AOC7M, and SFP-10G-AOC10M</p> <p>DS-SFP-FC16G-SW (16, 8 and 4G modes),DS-SFP-FC16G-LW (16, 8 and 4G modes),DS-SFP-FC8G-SW,DS-SFP-FC8G-LW,DS-SFP-FC4G-SW, DS-SFP-FC4G-LW</p>
Fabric extender fabric interfaces	6 x 40 Gigabit Ethernet QSFP (24 x 10 Gigabit Ethernet)
Fabric extender fabric interfaces type	<p>Fiber: QSFP-40G-SR-BD, QSFP-40G-SR4,QSFP-40G-SR4-S, QSFP-40G-LR4, QSFP-40G-LR4-S, and QSFP-40G-CSR4-S</p> <p>Copper: 40 Gigabit Ethernet QSFP+ active Twinax cables (QSFP-H40G-ACU7M and QSFP-H40G-ACU10M (no passive cables)</p> <p>AOC cables: QSFP-H40G-AOC1M, QSFP-H40G-AOC2M, QSFP-H40G-AOC3M, QSFP-H40G-AOC5M, QSFP-H40G-AOC7M, QSFP-H40G-AOC10M, and QSFP-H40G-AOC15M</p> <p>AOC breakout cables: QSFP-4X10G-AOC1M, QSFP-4X10G-AOC2M, QSFP-4X10G-AOC3M, QSFP-4X10G-AOC5M, QSFP-4X10G-AOC7M, and QSFP-4X10G-AOC10M</p> <p>Copper breakout cables: QSFP-4x10G-AC7M and QSFP-4x10G-AC10M (no passive cables)</p> <p>Distance between Cisco Nexus 2300 fabric extender and Cisco Nexus 5500 switch is up to 10 km (up to 3 km for FCoE traffic), and for the Cisco Nexus 5600 switch or 6000 Series Switch the distance is up to 3 km (300m for FCoE traffic)</p> <p>All equivalent S-class optics are supported</p> <p>Cisco 40GBASE QSFP to SFP+/SFP adapter (CVR-QSFP-SFP10G)</p>
Fabric speed	Up to 240 Gbps in each direction (480-Gbps full duplex)
Oversubscription	Up to 2:1
Performance	Hardware forwarding at 1440 Gbps or 2160 million packets per second (mpps)
FCoE	FCoE supported (Cisco Nexus 5500 and 5600 platforms and 6000 Series) (select N7k platforms since 7.3 release)
Cisco parent switch	<p>Cisco Nexus 5500 and 5600 platforms</p> <p>Cisco Nexus 6000 Series</p> <p>Cisco Nexus 7000 Series and 7700 platform</p> <p>Cisco Nexus 9300 and 9500 Series</p>
Minimum software	<p>Cisco NX-OS Release 7.0(3)N1(1)</p> <p>(Cisco Nexus 5500 and 5600 platforms and 6000 Series)</p>





	<p>Cisco NX-OS Release 7.2.0D1(1) (Cisco Nexus 7000 Series and 7700 platform)</p> <p>Cisco NX-OS Release 7.0(3)I2(1) (Cisco Nexus 9300 Series and 9500 platform)</p> <p>Native FC support: Cisco NX-OS Release 7.3(0)N1(1) (Cisco Nexus 5600 platforms Only)</p>
Dimensions (H x W x D)	1.72 x 17.3 x 14.05 in. (4.37 x 43.94 x 35.69 cm)
Weight	15.50 lbs. (7.0 kg)
Environment	<p>Operating temperature: 32 to 131°F (0 to 55°C)</p> <p>Non-operating temperature: -40 to 158°F (-40 to 70°C)</p> <p>Humidity: 5 to 95 percent (noncondensing)</p> <p>Altitude: 0 to 10,000 ft. (0 to 3000m)</p>
Power supply	N2200-PAC-400W, N2200-PAC-400W-B, N2200-PDC-400W, and N2200-PDC-350W-B , NXA-PHV-500W, and NXA-PHV-500W-B
Fan modules	NXA-FAN-30CFM-F and NXA-FAN-30CFM-B (N+1 redundancy = 3 fans)
Typical input operating power	125W at 30m (maximum 200W)
Heat dissipation	425 BTU/hour (typical); 680 BTU/hour (maximum)
Regulatory compliance	Products should comply with CE Markings according to directives 2004/108/EC and 2006/95/EC
Safety	<p>UL 60950-1</p> <p>CAN/CSA-C22.2 No. 60950-1EN 60950-1</p> <p>IEC 60950-1AS/NZS 60950-1GB4943</p>
EMC: Emissions	<p>47CFR Part 15 (CFR 47) Class A</p> <p>AS/NZS CISPR22 Class A</p> <p>CISPR22 Class A</p> <p>EN55022 Class A</p> <p>ICES003 Class A</p> <p>VCCI Class A</p> <p>EN61000-3-2</p> <p>EN61000-3-3</p> <p>KN22 Class A</p> <p>CNS13438 Class A</p>
EMC: Immunity	<p>EN50082-1</p> <p>EN61000-6-1</p> <p>EN55024</p> <p>CISPR24</p> <p>EN300386</p> <p>KN 61000-4 series</p>
RoHS	The Cisco Nexus 2348UPQ, 2348TQ, and 2332TQ are RoHS-6 compliant
Network Equipment Building Standards (NEBS)	The Cisco Nexus 2348UPQ, 2348TQ, and 2332TQ meet NEBS level-3 standards (hardware revision 3) (not currently supported)
Description	Specification
Layer 2 features	<p>Layer 2 VLAN trunks</p> <p>IEEE 802.1Q VLAN encapsulation</p>



	<p>Cisco EtherChannel technology on uplinks</p> <p>PortChannel on server ports on Cisco Nexus 2200 platforms</p> <p>Advanced PortChannel hashing</p> <p>Jumbo frames on all ports (up to 9216 bytes)</p> <p>Pause frames (Priority Flow Control [PFC] and IEEE 802.3x)</p> <p>Private VLANs (promiscuous only on uplinks)</p> <p>Local multicast replication on Cisco Nexus 2200 platform (8000 entries)</p> <p>Autonegotiation to 1000BASE-T; full duplex on host interfaces</p>
Enhanced Ethernet	DCB
Quality of service (QoS)	<p>Layer 2 IEEE 802.1p (class of service [CoS])</p> <p>8 hardware queues per port (Cisco Nexus 2200 platforms), or 4 hardware queues per port (Cisco Nexus 2148T)</p> <p>Per-port QoS configuration</p> <p>Local policing on Cisco Nexus 2200 platform (64 policers)</p> <p>CoS trust</p> <p>Configurable tail-drop threshold on Cisco Nexus 2200 platforms</p> <p>Egress strict-priority queuing</p> <p>Egress port-based scheduling: Weighted Round Robin (WRR)</p>
High availability	<p>Hot-swappable field-replaceable power supplies and fan modules</p> <p>1:1 power redundancy</p> <p>Uplink traffic management through Cisco EtherChannel hashing or static port pinning</p> <p>vPCs for dual-homed active-active connectivity across two Cisco Nexus 5000 or 6000 Series Switches</p> <p>vPCs for dual-homed straight-through NIC connectivity across two Cisco Nexus 2000 Series Fabric Extenders</p> <p>In-Service Software Upgrade (ISSU)</p>
Security	Local classification (256 access control list [ACL] entries)
Management	<p>Fabric extender management using in-band management</p> <p>Locator and beacon LEDs on front and back of chassis (locator beacons on the front and rear of the chassis help reduce errors when the equipment is serviced)</p> <p>Per-port locator and beacon LEDs</p> <p>Syslog</p> <p>Simple Network Management Protocol Versions 1, 2, and 3 (SNMP v1, v2, and v3)</p> <p>Enhanced SNMP MIB support</p> <p>XML (NETCONF) support</p> <p>Remote Monitoring (RMON)</p> <p>Cisco Discovery Protocol Versions 1 and 2</p> <p>Cisco Switched Port Analyzer (SPAN) source on server ports</p> <p>Power-on self-test (POST)</p> <p>Cisco Generic Online Diagnostics (GOLD): Ethernet</p> <p>Comprehensive bootup diagnostic tests</p> <p>CiscoWorks</p> <p>Cisco Data Center Network Manager (DCNM); the Cisco Nexus 2000 Series is managed through the parent Cisco Nexus switch using DCNM and standard SNMP, XML interface, and command-line interface (CLI)</p>
Configuration MIBs	<p>ENTITY-MIB</p> <p>IF-MIB</p>

	<p>FABRIC-EXTENDER MIB</p> <p>CISCO-ENTITY-EXT-MIB</p> <p>CISCO-ENTITY-FRU-CONTROL-MIB</p> <p>CISCO-ENTITY-SENSOR-MIB</p> <p>CISCO-ETHERNET-FABRIC-EXTENDER-MIB</p>
Monitoring MIBs	<p>RMON-MIB</p>
Industry standards	<p>IEEE 802.1p: CoS prioritization</p> <p>IEEE 802.1Q: VLAN tagging</p> <p>IEEE 802.3: Ethernet</p> <p>IEEE 802.3ae: 10 Gigabit Ethernet</p> <p>SFF 8431 SFP+ support</p> <p>IEEE 802.3u 100BASE-TX specification</p> <p>IEEE 802.3ab 1000BASE-T specification</p> <p>IEEE 802.3an 10GBASE-T</p> <p>10GBASE-SR</p> <p>10GBASE-LR</p> <p>RMON</p> <p>SFF-8461</p>

Want to Buy?

Order Now

Get a Quote



[Learn More](#) about Hi-Network



[Search](#) our Resource Library



[Follow](#) us on LinkedIn



Contact for [Sales](#) or [Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

Email: info@hi-network.com

Skype: echo.hinetwork