

[Get a Quote](#)

Overview

The S5700 series Ethernet switches are next-generation energy-saving switches developed by Huawei to meet the demand for high-bandwidth access and Ethernet multi-service aggregation. Based on cutting-edge hardware and Huawei Versatile Routing Platform (VRP) software, the S5700 provides a large switching capacity, high reliability (double power slots and hardware Ethernet OAM), and high-density GE ports to accommodate 10 Gbit/s upstream transmissions. It also supports Energy Efficient Ethernet (EEE) and iStack. The S5700 can be used in various enterprise network scenarios. For example, it can function as an access or aggregation switch on a campus network, a gigabit access switch in an Internet data center (IDC), or a desktop switch to provide 1000 Mbit/s access for terminals.

Quick Specification

Table 1 shows the Quick Specification.


| | |
|--|---|
| Model | S5735S-L48T4S-MA |
| Part Number | 98010971 |
| Description | S5735S-L48T4S-MA (48*10/100/1000BASE-T ports, 4*GE SFP ports, AC power) |
| First supported version | V200R019C10SPC500 |
| Memory | 1 GB |
| Flash memory | 512 MB in total. To view the available flash memory size, run the display version command. |
| PoE | Not supported |
| Weight with packaging [kg(lb)] | 4.42 |
| Dimensions without packaging (H x W x D) [mm(in.)] | <p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)</p> |

Figure 1 shows the appearance of S5735S-L48T4S-MA.



Product Details

Figure 2 shows the structure of S5735S-L48T4S-MA.

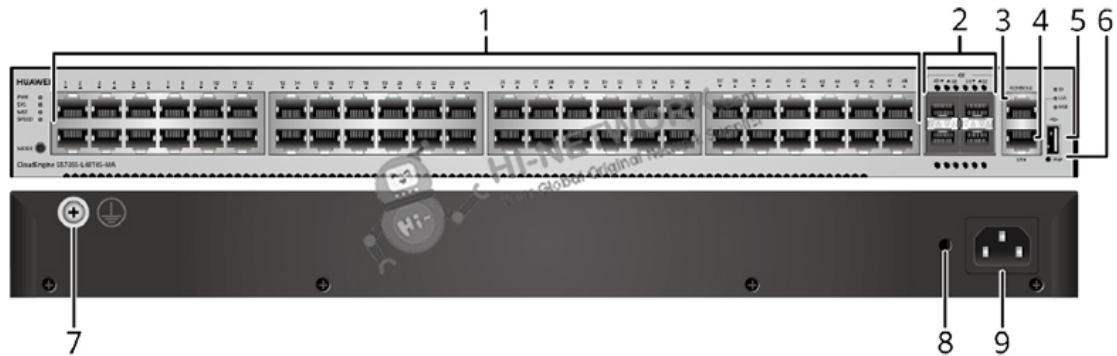

Note:

| | | | |
|-----|-------------------------------------|-----|---------------------------------------|
| (1) | Forty-eight 10/100/1000BASE-T ports | (6) | One PNP button |
| (2) | Four 1000BASE-X ports | (7) | Ground screw |
| (3) | One console port | (8) | Jack for AC power cable locking strap |
| (4) | One ETH management port | (9) | AC socket |
| (5) | One USB port | | |

Get More Information

Do you have any question about the S5735S-L48T4S-MA (98010971)?

Contact us now via info@hi-network.com.

Specification

| S5735S-L48T4S-MA Specification | |
|--|---|
| Model | S5735S-L48T4S-MA |
| Part Number | 98010971 |
| Description | S5735S-L48T4S-MA (48*10/100/1000BASE-T ports, 4*GE SFP ports, AC power) |
| First supported version | V200R019C10SPC500 |
| Dimensions without packaging (H x W x D) [mm(in.)] | <p>Basic dimensions (excluding the parts protruding from the body): 43.6 mm x 442.0 mm x 220.0 mm (1.72 in. x 17.4 in. x 8.7 in.)</p> <p>Maximum dimensions (the depth is the distance from ports on the front panel to the parts protruding from the rear panel): 43.6 mm x 442.0 mm x 227.0 mm (1.72 in. x 17.4 in. x 8.94 in.)</p> |
| Chassis height [U] | 1 |

| | |
|--|--|
| Weight with packaging [kg(lb)] | 4.42 |
| Typical power consumption [W] | 37 |
| Typical heat dissipation [BTU/hour] | 126.25 |
| Maximum power consumption [W] | 53 |
| Maximum heat dissipation [BTU/hour] | 180.8 |
| MTBF [year] | 46.36 |
| MTTR [hour] | 2 |
| Availability | >0.99999 |
| Noise at normal temperature (acoustic power) [dB(A)] | 53.3 |
| Noise at normal temperature (acoustic pressure) [dB(A)] | 38.5 |
| Number of card slots | 0 |
| Number of power slots | 0 |
| Number of fans modules | 1 |
| Redundant power supply | Not supported |
| Long-term operating temperature [°C(°F)] | -5°C to +50°C (23°F to 122°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Short-term operating temperature [°C(°F)] | -5°C to +55°C (23°F to 131°F) at an altitude of 0-1800 m (0-5906 ft.) |
| Restriction on the operating temperature variation rate [°C(°F)] | <p>When the altitude is 1800-5000 m (5906-16404 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.).</p> <p>The equipment can operate beyond the normal operating temperature range for a short-term period, but the following conditions must be met:</p> <ul style="list-style-type: none"> - The equipment operates at a temperature of over 50°C (122°F) consecutively for at most 96 hours in one year. - The equipment operates at a temperature of over 50°C (122°F) for a total of no more than 360 hours in one year. - The equipment operates at a temperature of over 50°C (122°F) for no more in 15 times in one year. <p>The equipment may be damaged or experience unexpected exceptions if any of the preceding limits is exceeded.</p> <p>The equipment cannot start when the temperature is lower than 0°C (32°F). The maximum distance of optical modules used in these conditions cannot exceed 10 km.</p> |
| Storage temperature [°C(°F)] | -40°C to +70°C (-40°F to +158°F) |
| Long-term operating relative humidity [RH] | 5% to 95%, noncondensing |
| Long-term operating altitude [m(ft.)] | 0-5000 m (0-16404 ft.) |
| Storage altitude [m(ft.)] | 0-5000 m (0-16404 ft.) |
| Power supply mode | AC built-in |
| Rated input voltage [V] | <ul style="list-style-type: none"> - AC input: 100 V AC to 240 V AC, 50/60 Hz - High-Voltage DC input: 240 V DC |
| Input voltage range [V] | <ul style="list-style-type: none"> - AC input: 90 V AC to 264 V AC, 47 Hz to 63 Hz - High-Voltage DC input: 190 V DC to 290 V DC |
| Memory | 1 GB |

| | |
|------------------------------------|--|
| Flash memory | 512 MB in total. To view the available flash memory size, run the display version command. |
| Console port | RJ45 |
| Eth Management port | RJ45 |
| USB | Supported |
| RTC | Not supported |
| RPS input | Not supported |
| Service port surge protection [kV] | Common mode: ± 7 kV |
| Power supply surge protection [kV] | ± 6 kV in differential mode, ± 6 kV in common mode |
| Types of fans | Built-in |
| Heat dissipation mode | Heat dissipation with fan, intelligent fan speed adjustment |
| Airflow direction | Air intake from left and front, air exhaustion from right |
| PoE | Not supported |
| Certification | EMC certification Safety certification Manufacturing certification |

Want to Buy

[Get a Quote](#)

[Learn More](#) about Hi-Network

[Search](#) our Resource Library

[Follow](#) us on LinkedIn

 Contact for [Sales](#) or [Support](#)

Contact HI-NETWORK.COM For Global Fast Shipping

HongKong Office Tel: +00852-66181601

HangZhou Office Tel: +0086-571-86729517

 Email: info@hi-network.com

 Skype: [echo.hinetwork](https://www.skype.com/add?contact=echo.hinetwork)

WhatsApp Business: +8618057156223

